

Garden Tools

Chain Saws

CS-3010





Input	1,200 W
Saw Length	300 mm
Overall Dimensions	619 x185 x173 mm
Weight	2.8 kg

- Compact 300 mmchainsaw.
 Saw chain oil is supplied automatically
- * Extra-sharp saw chain.

CS-3610





Input	1,200 W
Saw Length	360 mm
Overall Dimensions	684 x185 x173 mm
Weight	2.9 kg

- Compact 360 mmchainsaw.
- Saw chain oil is supplied automatically.
- Extra-sharp saw chain.

CS-362L





Input	1,200 W
Saw Length	360 mm
Overall Dimensions	684 x207 x173 mm
Weight	3.0 kg

- * Compact 360 mmchainsaw.
 * Tool free feature for saw chain tension
- * Saw chain oil is supplied automatically.

 * Extrasharp saw chain.

GCS-1500

CompactChain Saw

CS-402L





Input	1,200 W
Saw Length	400 mm
Overall Dimensions	727 x207 x173 mm
Weight	3.1 kg

- * Compact 400 mmchainsaw.
- * Tool free feature for saw chain tension adjustment.
- Saw chain oil is supplied automatically
- * Extra-sharp saw chain.

CS-2240





Input	2,200 W
Saw Length	400 mm
Overall Dimensions	450 x250 x190 mm
Weight	5.1 kg

- 2,200 W high power motor.

 Tool free fleature for saw chain adjustment. Automatic chain lubrication system.

Saw Length

Overall Dimensions

Auto oil

Input

- * Ultra compact chainsaw.
 * Tool free feature for saw chain tension
- adjustment.

 * Saw chain oil is supplied automatically.

180 W (100 V)

374 x180 x155 mm

95 mm

1.4 kg

Specifications

Model	Input	Saw Length	Overall Dimensions	Weight
CS-3010	1,200 W	300 mm	619 x 185 x 173 mm	2.8 kg
CS-3610	1,200 W	360 mm	684 x 185 x 173 mm	2.9 kg
CS-362L	1,200 W	360 mm	684 x 207 x 173 mm	3.0 kg
CS-402L	1,200 W	400 mm	727 x 207 x 173 mm	3.1 kg
CS-2240	2,200 W	400 mm	450 x 250 x 190 mm	5.1 kg
Model	Input	Saw Length	Overall Dimensions	Weight
GCS-1500	180 W (100 V)	QE mm	374 v180 v155 mm	1 A km

41

GassShear/Pluner

AK-3710



Input	400 W
Blade Type	Nylon
Rotation Speed	11,000 min ⁻¹
Overall Dimensions	1,281 x237 x276 mm
Weight	2.1 kg

- * Extendable pole (Lengthfrom 1,281 to 1,361 mm)
 * 180 degree rotating head for easy edge cutting.

AK-3000



Input	320 W
Blade Type	Metal / Nylon
Rotation Speed	7,800 min ⁻¹
Overall Dimensions	1,431 x224 x274 mm
Weight	2.5 kg

* "Two in One" Metal blade and nylon blade are usable depend on the cutting situation.

BH-360



220 x100 x73 mm

0.5 kg

Overall Dimensions	602 x180 x168 mm	
Weight	1.7 kg	
* Lownoise and vibration thanks to anti-noise and		

Max Cutting Diameter 15 mm

anti-vibration rubber installed.

320 W

Hedge Trimmers

HT-3022

Input

Saw Length

HT-3632



Input	320 W
Max Cutting Diameter	17 mm
Saw Length	360 mm
Overall Dimensions	658 x180 x168 mm
Weight	1.9 kg

- Lownoise and vibration thanks to anti-noise and
- anti-vibration rubber installed.

 Dimple blade reduces adherence of resin and prolongs the blade life.

HT-4240



Input	330 W
Max Cutting Diameter	20 mm
Saw Length	420 mm
Overall Dimensions	713 x186 x167 mm
Weight	2.1 kg

- * Extra sharp blade for professional use.
- Lownoise and vibration thanks to anti-noise and anti-vibration rubber installed.
 Dimple blade reduces adherence of resin and
- prolongs the blade life.

Lawn Mowers

BSH-120



Voltage	3.6 V
Max. Cutting Capacity	φ 12 mm
Charging Time	60 minutes
Battery Type	Li-ion 1,300 mAh
Overall Dimensions	300 x52 x98 mm
Weight	0.6 kg

- * Powerful cutting performance.
 * Compact and light-weight design for effortless and continuous work.

 * Tool-free blade change.

 * Built-in LED for clearly visible pruning.

LMR-2300



Input	500 W
Mowing Ability	550 m²/h
Mowing Width	230 mm
Mowing Depth	10, 15, 20, 25, 30, 40 and 50 mm
Overall Dimensions	1,060 x277 x912 mm
Weight	6.8 kg

- * Powerful cutting with high torque.
- Improved safety with electric brake.
 (Cutter stops in 8 sec. when turning off the switch.)

LM-2810

Overall Dimensions



Input	50 W
Mowing Ability	650 m ² /h
Mowing Width	280 mm
Mowing Depth	5 ~ 50 mm
Overall Dimensions	1,017 x357 x930 mm
Weight	10 kg


^{*} Compact and high power mower.

HT-5040



_	
Input	330 W
Max Cutting Diameter	20 mm
Saw Length	500 mm
Overall Dimensions	797 x186 x167 mm
Weight	2.2 kg

- * Extra sharp blade for professional use.
- Lownoise and vibration thanks to anti-noise and anti-vibration rubber installed.
 Dimple blade reduces adherence of resin and prolongs the blade life.

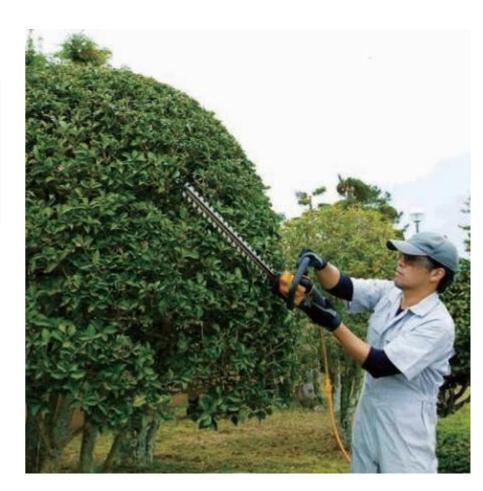

Specifications

Model	Input	Blade Type	Rotation Speed	Overall Dimensions	Weight
AK-3710	400 W	Nylon	11,000 min¹	1,281 x 237 x 276 mm	2.1 kg
AK-3000	320 W	Metal/ Nylon	7,800 min¹	1,431 x 224 x 274 mm	2.5 kg

Model	Voltage	Overall Dimensions	Weight
BH-360	3.6 V	220 x100 x73 mm	0.5 kg

Mode	el	Voltage	Max. Cutting Capacity	Charging Time	Battery Type	Overall Dimensions	Weight
BSH-1	20	3.6 V	φ 1 mm	60 minutes	Li- 1,30 mAh	30 x5 x9 mm	0.6 kg
			2		ion 0	0 2 8	
Mode	el I	nput N	Nowing Ability N	Mowing Width	Mowing Depth	Overall Dimensions	Weight
LMR-23	500 50	00 W	550 m²/ h	230 mm	10 15 20 25 30,40 an 50 mm	1,060 x 277 x 912 mm	6.8 kg
					, , , d		
LM-28	10 40	00 W	650 m²/ h	280 mm	5~ 50 mm	1,017 x 357 x 930 mm	10 kg

Specifications

Model	Input	Max Cutting Diameter	Saw Length	Overall Dimensions	Weight
HT-3022	320 W	15 mm	300 mm	602 x 18 x 16 mm 0 8	1.7 kg
HT-3632	320 W	17 mm	360 mm	658 x 18 x 16 mm 0 8	1.9 kg
HT-4240	330 W	20 mm	420 mm	713 x 18 x 16 mm 6 7	2.1 kg
HT-5040	330 W	20 mm	500 mm	797 x 18 x 16 mm 6 7	2.2 kg

43